



2020

**Passenger Car
and Light Truck Tire**
Product Guide

A Singapore Based Global Tire Company

Giti Tire has been in the tire business for more than 65 years. The company has become one of the world's largest tire manufacturers, serving customers in more than 130 countries.

5 R&D and Testing Centers
4 R&D in Germany, USA, China,
Indonesia, and 1 testing center in UK

8 Manufacturing Plants
6 in China, 1 in Indonesia
1 Newly opened in the US

12 Offices
Singapore, Indonesia, Malaysia, China, U.S., Canada,
U.K., Germany, France, Brazil, Italy and Dubai

More than
33,000 Employees
Worldwide

More than
70,000 Points of Sale
In more than 130 countries





Why Choose GT RADIAL Tires?

GT RADIAL brand tires focus primarily on quality; providing comfortable, durable, and adaptable tires for drivers of all backgrounds.

A Focus on Production and Quality Management

GT RADIAL's parent company (Giti Tire) sets the highest standard of quality procedures. A highly stringent quality control system and concern for the safety and quality demands in regions across the globe separates the brand from the competition.

Top Class R&D Facilities & Personnel

A team of over 600 experienced R&D engineers in five cutting-edge facilities around the world and top quality equipment ensure the utmost quality of tire production and delivery.

Awards and Recognition From the Best

The company has earned extensive recognition from highly credited organizations around the world, as well as some of the automotive industry's largest names. This includes top supplier awards from General Motors, Nissan, Walmart, and many others.

Respect Around the World

GT RADIAL tires products are trusted by all types of individuals, from the everyday driver to top motorsports performers. Through top performance and an extensive dealer network, the brand has a reputation for quality, performance, and safety.

A Greater Mission

Giti Tire has an environmental and humanitarian drive that ties into all actions. The company focuses on multiple areas to properly educate people about driving and tire care, reduce energy consumption and pollution, as well as provide financial resources to help make the world a better place.



A Strong Presence All Around the World

As a Singapore based global tire company, one of Giti Tire's strengths is its international reach encompassing distribution, facilities, OEM fitments, and brand-driven motorsports.

This begins from Giti's 12 offices, eight manufacturing plants in three countries, and tire sales in more than 130 countries around the world, and continues with Giti's highly diverse team-members, partners, and activities globally.

Just having a number of global offices is not enough. True international-connectivity is to have all aspects of the company working together, to best execute strategy, production, and sales on both global and local levels.



International Accreditations



Giti Tire (UK) Ltd

European Tire Testing Center in Mira, UK

R&D Center in Hanover, Germany

Giti Tire Deutschland GmbH



R&D Center in Anhui, China

Giti Tire (China) Investment Co. Ltd.



Giti Tire Europe Representative Office in Italy

Giti Tire (M.E.A.) FZCO.



Giti Tire Pte Ltd., Singapore



Giti Tire (France) SAS

R&D Center in Tangerang, Indonesia

PT Gajah Tunggal Tbk., Indonesia

Giti Tire (Malaysia) Sdn. Bhd



3 Production Countries: 1 Truly Global Tire Company

When you put on a set of GT RADIAL Tires on your vehicle, you can be confident that your tires have been put through one of the most rigorous and comprehensive quality control systems in the industry.



Factories in Indonesia, China, and the a full new tire production facility in South Carolina of the United States

All plants have obtained ISO/TS16949:2002 accreditation (a highest standard of quality control) and ISO14001 Environmental Management System Accreditation

Eight Giti facilities have an annual capacity of more than 110 million tires.

Very strict quality controls and inspections at each stage of the production process to ensure that each component meets relevant specifications and standards



One of Giti's eight manufacturing bases



A Giti Tire production line



Partnerships with Many Top Auto Manufacturers

Giti Tire has continued to strengthen its ambitions and relationships integral to developing its original equipment manufacturer (OEM) business. In conjunction with the company's strong developments in core areas such as technology, marketing, and quality management, Giti Tire has been awarded many contracts by existing and new OEM partners. This not only provides a steady demand from automotive producers themselves, but also increases demand and brand recognition in replacement markets.

In order to work more closely with our strategic partners, Giti Tire has employed dedicated OEM specialists in key markets around the world, and is continuously adding new partnerships and fittings.

Through partnerships with leading global auto manufacturers, Giti has gained strong brand notoriety and the ability of users to experience the satisfaction of its products. This leads to word-of-mouth brand recognition, as well as improving the replacement market for these patterns.

Supplying more than 260 models worldwide

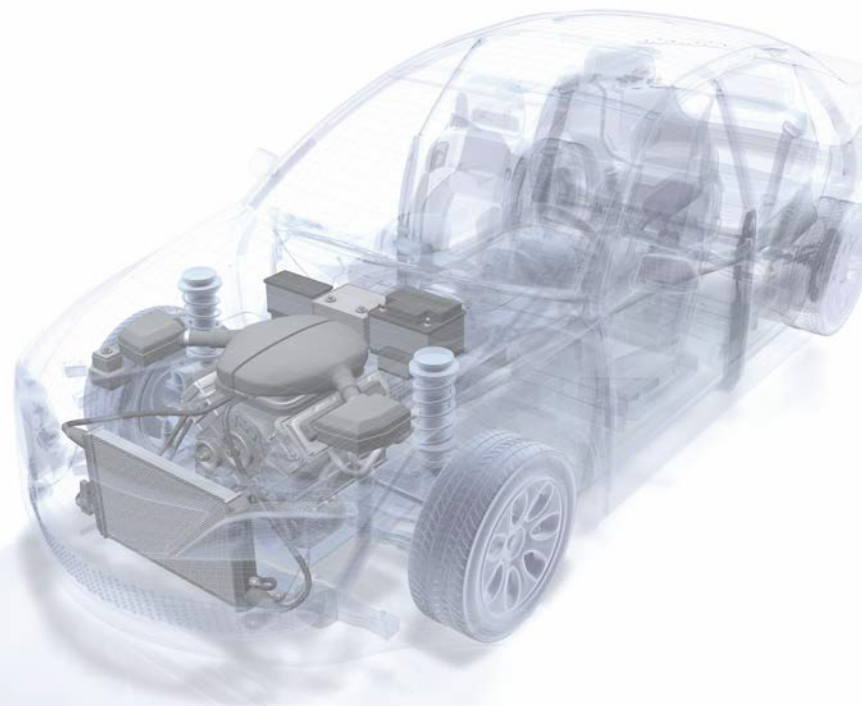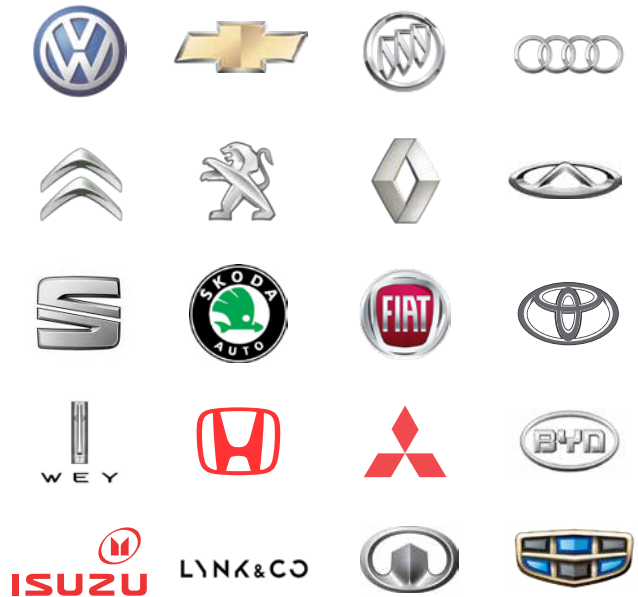

CHOOSING YOUR GT RADIAL TIRE

Choose the best tire that fit with your vehicle.



PASSENGER CAR

ULTRA HIGH PERFORMANCE



SportActive



CHAMPIRO UHPAS



CHAMPIRO SX2

COMFORT - ALL GROUND PERFORMANCE



CHAMPIRO FE1



CHAMPIRO VPI



4SEASONS



SUV&4X4

ULTRA HIGH PERFORMANCE



CHAMPIRO HPY
(SUV)



CHAMPIRO 528

MUD TERRAIN



SAVERO KOMODO
M/T PLUS



SAVERO M/T



ADVENTURO M/T



COMMERCIAL
VAN

URBAN AND REGIONAL



MAXMILER-X



MAXMILER Pro



MAXMILER
ALLSEASON

ULTRA HIGH PERFORMANCE



CHAMPRO GTX Pro



CHAMPRO HPY



MAXTOUR

MILEAGE

COMFORT - ALL GROUND PERFORMANCE



CHAMPRO ECO

HIGHWAY TERRAIN



SAVERO HT2



SAVERO HT PLUS



SAVERO SUV

ALL TERRAIN



ADVENTURO AT³



ADVENTURO A/T



SAVERO A/T PLUS

URBAN AND REGIONAL



KargoMax ST-4000



KargoMax ST-6000



SUPER TRAVELER 668



PASSENGER CAR

A red car is shown from the side, driving on a winding asphalt road that curves through a lush green landscape. The road has double yellow lines. In the foreground, large, vibrant green leaves are partially obscuring the view. The background features rolling green hills under a bright sky.

**A WIDE RANGE OF QUALITY
TIRES TO MEET YOUR DRIVING
REQUIREMENTS, WITH STRENGTHS
IN COMFORT, DURABILITY,
CONTROL, AND HIGH-MILEAGE**

HIGH PERFORMANCE



SportActive

The new SportActive is specifically developed for high powered rear and front wheel drive premium cars, with superb traction, immediate steering response and ultimate driving control in dry and wet conditions.

FEATURES & BENEFITS

INNOVATIVE NEW PROFILE
Firm high speed HANDLING and ULTIMATE GRIP

NEW BLOCK STIFFNESS
Optimal CORNERING and handling



NEW TREAD COMPOUND
Endures long durability and good mileage throughout the tire life

SPECIAL DESIGN WIDE GROOVES AND SIPES
Short braking distances on wet and dry roads, REDUCED AQUAPLANING

SportActive

HIGH PERFORMANCE



Inch	Series	Size	Load Index	Speed Rating	UTQG	Tread Depth mm	Overall Diameter mm	Side Wall	
19	35	225/35R19	88	Y	320AA	7.7	641	BSW	
	35	235/35R19	91	Y	320AA	7.7	647	BSW	
	35	245/35R19	93	Y	320AA	7.7	655	BSW	
	35	255/35R19	96	Y	320AA	7.7	661	BSW	
	40	225/40R19	93	Y	320AA	7.7	663	BSW	
	40	255/40R19	100	Y	320AA	7.7	687	BSW	
	45	225/45R19	96	W	320AA	7.7	685	BSW	
	50	255/50R19	107	W	320AA	8.0	739	BSW	
	55	235/55R19	105	V	320AA	8.0	741	BSW	
	55	255/55R19	111	V	320AA	8.0	763	BSW	
18	35	255/35R18	94	Y	320AA	7.7	635	BSW	
	35	265/35R18	97	Y	320AA	7.7	643	BSW	
	40	225/40R18	92	Y	320AA	7.7	637	BSW	
	40	235/40R18	95	W	320AA	7.7	645	BSW	
	40	235/40R18	95	Y	320AA	7.7	645	BSW	
	40	245/40R18	97	Y	320AA	7.7	653	BSW	
	45	225/45R18	95	W	320AA	7.7	659	BSW	
	45	225/45R18	95	Y	320AA	7.7	659	BSW	
	45	235/45R18	98	W	320AA	7.7	669	BSW	
	45	245/45R18	100	W	320AA	7.7	677	BSW	
	45	245/45R18	100	Y	320AA	7.7	677	BSW	
	45	255/45R18	103	W	320AA	7.7	687	BSW	
	50	235/50R18	97	V	320AA	8.0	693	BSW	
	55	225/55R18	98	V	320AA	8.0	705	BSW	
	55	255/55R18	109	W	320AA	7.7	737	BSW	
	60	235/60R18	107	V	320AA	8.0	739	BSW	
	17	40	205/40R17	84	W	320AA	7.7	596	BSW
		40	215/40R17	87	W	320AA	7.7	604	BSW
40		245/40R17	91	Y	320AA	7.7	628	BSW	
40		255/40R17	98	Y	320AA	7.7	636	BSW	
45		205/45R17	88	V	320AA	7.7	616	BSW	
45		205/45R17	88	W	320AA	7.7	616	BSW	
45		215/45R17	91	W	320AA	7.7	626	BSW	
45		225/45R17	91	Y	320AA	7.7	634	BSW	
45		225/45R17	91	W	320AA	7.7	634	BSW	
45		225/45R17	94	W	320AA	7.7	634	BSW	
45		235/45R17	97	W	320AA	7.7	644	BSW	
45		235/45R17	97	Y	320AA	7.7	644	BSW	
45		245/45R17	99	W	320AA	7.7	652	BSW	
50		215/50R17	95	Y	320AA	7.7	648	BSW	
50		225/50R17	98	W	320AA	7.7	658	BSW	
50		225/50R17	98	Y	320AA	7.7	658	BSW	
16		45	195/45R16	84	V	320AA	7.7	582	BSW
		45	205/45R16	87	W	320AA	7.7	590	BSW
	45	215/45R16	90	V	320AA	7.7	600	BSW	

UTQG Uniform Tire Quality Grade BSW Black Side Wall

ULTRA HIGH PERFORMANCE




CHAMPIRO UHP^{AS}

For vehicle owners requiring Ultra-High Performance or grand touring tires, the CHAMPIRO UHP AS delivers excellent straight-line stability, cornering grip, and braking capabilities in both dry and wet conditions, providing excellent grip and long tread life.

FEATURES & BENEFITS

FULL DEPTH SIPES
Provides improved all season performance throughout the life of the tire

RIM PROTECTOR
Protects wheels from curb damage

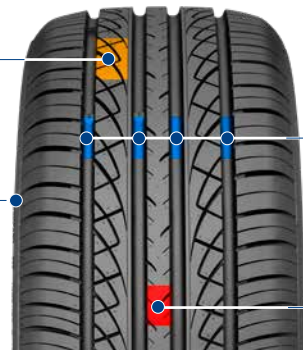

ADVANCED TREAD COMPOUND
New tread compound delivers improved wear life and all season performance



FOUR WIDE CIRCUMFERENTIAL GROOVES
Reduces hydroplaning for improved wet performance

CENTER RIB DESIGN
Delivers straight line stability and crisp steering response

CHAMPIRO UHP^{AS}


ULTRA HIGH PERFORMANCE



Inch	Series	Size	Load Index	Speed Rating	UTQG	 Tread Depth mm	 Overall Diameter mm	Side Wall	
20	40	275/40ZR20	106	Y	500AA	8.2	728	BSW	
	45	245/45ZR20	103	Y	500AA	8.2	728	BSW	
19	40	245/40ZR19	94	Y	500AA	8.2	679	BSW	
	40	255/40ZR19	100	Y	500AA	8.2	687	BSW	
	45	225/45ZR19	92	W	500AA	8.2	685	BSW	
18	45	245/45ZR19	98	Y	500AA	8.2	703	BSW	
	18	40	225/40ZR18	92	Y	500AA	8.2	637	BSW
		40	235/40ZR18	95	Y	500AA	8.2	645	BSW
		45	215/45ZR18	93	Y	500AA	8.2	651	BSW
		45	225/45ZR18	91	W	500AA	8.2	659	BSW
		45	235/45ZR18	94	W	500AA	8.2	669	BSW
45		245/45ZR18	96	Y	500AA	8.2	677	BSW	
17	50	235/50ZR18	101	W	500AA	8.2	693	BSW	
	17	45	215/45ZR17	91	W	500AA	8.2	626	BSW
		45	225/45ZR17	94	W	500AA	8.2	634	BSW
		45	235/45ZR17	97	W	500AA	8.2	644	BSW
		50	205/50ZR17	93	W	500AA	8.2	638	BSW
		50	215/50ZR17	91	W	500AA	8.2	648	BSW
		50	225/50ZR17	94	W	500AA	8.2	658	BSW
		55	215/55R17	94	V	500AA	8.2	668	BSW
		55	225/55ZR17	97	W	500AA	8.2	680	BSW
		55	235/55ZR17	99	W	500AA	8.2	690	BSW
16		50	195/50R16	84	V	500AA	8.2	602	BSW
	50	205/50R16	87	V	500AA	8.2	612	BSW	
15	55	195/55R15	85	V	500AA	8.2	595	BSW	

UTQG Uniform Tire Quality Grade BSW Black Side Wall

ULTRA HIGH PERFORMANCE

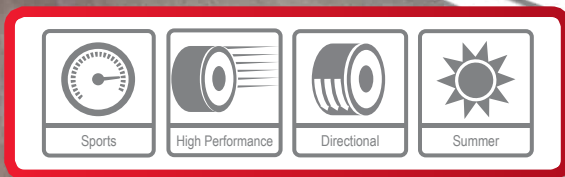

CHAMPIRO SX2

Durable and Optimum Grip Control for Touring, Slalom and Drift's heavy maneuvering and acceleration.



FEATURES & BENEFITS

SLOPE EDGE BLOCK

Enhance optimum grip and dry cornering

ASYMMETRIS DUAL BLOCK DESIGN

Excellent grip for maximum straight & cornering performance in both dry & wet surfaces

GRADIENT MAIN GROOVE

Reduce noise, optimize tread heat distribution and provide excellent water evacuation on wet condition



SIPED CENTER RIB

Provide lateral stiffness needed for fast steering response and increase grip, especially under heavy acceleration and cornering

STRONG MASSIVE SHOULDER BLOCK

For extreme straight and cornering grip


CONTINUES SHOULDER RIB

Specially designed to provide stable and maximum grip

CHAMPIRO SX2

ULTRA HIGH PERFORMANCE



Inch	Series	Size	Load Index	Speed Rating	UTQG	 Tread Depth mm	 Overall Diameter mm	Side Wall
18	40	245/40ZR18	93	W	200AA	6.4	653	BSW
17	40	215/40ZR17	83	W	200AA	6.4	604	BSW
	40	235/40ZR17	90	W	200AA	6.4	620	BSW
16	50	205/50R16	87	V	200AA	6.4	612	BSW
	50	225/50R16	92	V	200AA	6.4	632	BSW
15	50	195/50R15	82	V	260AA	6.4	574	BSW
	55	195/55R15	85	V	200AA	6.4	595	BSW

UTQG Uniform Tire Quality Grade BSW Black Side Wall

ULTRA HIGH PERFORMANCE



CHAMPIRO GTX Pro

GT Radial CHAMPIRO GTX Pro is a high performance tuning tire specially designed and developed for today's car enthusiasts who are looking for style and superior performance.


FEATURES & BENEFITS

SOLID CENTER RIB WITH SMALL SIPES

Ensure good directional stability and fast Steering response for superior handling

4 WIDE LONGITUDINAL AND LATERAL GROOVES

Maximum water evacuation to prevent aquaplaning

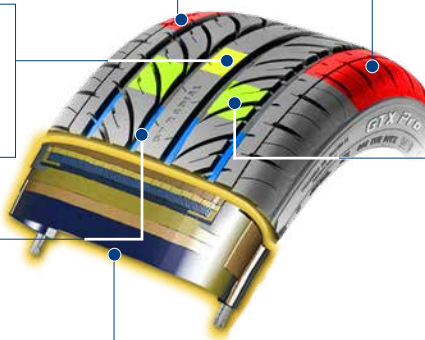

MODERN STRONG SHOULDER BLOCK WITH LATERAL GROOVE

Reducing noise and great cornering traction

ADVANCE DIRECTIONAL TREAD BLOCK DESIGN

Provide fast acceleration and good braking

WIDE HIGH TENSILE STEEL BELT WITH JOINTLESS COVER CONSTRUCTION

Optimized road contact and improve high speed capabilities

CHAMPIRO GTX Pro


ULTRA HIGH PERFORMANCE



Inch	Series	Size	Load Index	Speed Rating	UTQG	Tread Depth mm	Overall Diameter mm	Side Wall
18	45	225/45R18 XL	95	W	340AAA	8.1	659	BSW
	45	235/45R18	94	W	340AAA	8.2	669	BSW
	45	245/45R18 XL	100	W	340AAA	8.3	677	BSW
	40	225/40R18 XL	92	W	340AAA	8.1	637	BSW
	40	235/40R18 XL	95	W	340AAA	8.2	645	BSW
	35	215/35R18 XL	84	W	340AAA	8.0	607	BSW
17	55	215/55R17	94	V	340AAA	8.3	668	BSW
	55	225/55R17 XL	101	V	340AAA	8.5	680	BSW
	50	205/50R17 XL	93	V	340AAA	8.0	638	BSW
	50	215/50R17 XL	95	V	340AAA	8.0	648	BSW
	50	225/50R17 XL	98	V	340AAA	8.1	658	BSW
	45	205/45R17 XL	88	V	340AAA	7.9	616	BSW
	45	215/45R17 XL	91	V	340AAA	8.0	626	BSW
	45	225/45 R17 XL	94	W	340AAA	8.1	634	BSW
	45	235/45R17 XL	97	W	340AAA	8.2	644	BSW
	40	205/40R17 XL	84	V	340AAA	7.9	596	BSW
16	60	205/60R16	92	V	340AAA	7.8	652	BSW
	60	215/60R16	95	V	340AAA	7.7	664	BSW
	60	225/60R16	98	V	340AAA	8.4	676	BSW
	60	235/60R16	100	V	340AAA	8.5	688	BSW
	55	195/55R16	87	V	340AAA	7.9	620	BSW
	55	205/55R16	91	V	340AAA	7.9	632	BSW
	55	215/55R16	93	V	340AAA	8.3	642	BSW
	50	195/50R16	84	V	340AAA	7.3	602	BSW
	50	205/50R16	87	V	340AAA	8.0	612	BSW
	45	195/45R16 XL	84	W	340AAA	7.9	582	BSW
45	205/45R16 XL	87	V	340AAA	8.0	590	BSW	
15	65	175/65R15	84	H	340AAA	7.8	609	BSW
	65	185/65R15	88	H	340AAA	7.8	621	BSW
	65	195/65R15	91	H	340AAA	7.8	635	BSW
	65	205/65R15	94	H	340AAA	7.7	647	BSW
	60	175/60R15	81	H	340AAA	7.8	591	BSW
	60	185/60R15	84	H	340AAA	7.8	603	BSW
	60	195/60R15	88	H	340AAA	7.8	615	BSW
	60	205/60R15	91	H	340AAA	7.8	627	BSW
	55	185/55R15	82	V	340AAA	7.8	585	BSW
	55	195/55R15	85	V	340AAA	7.9	595	BSW
	50	195/50R15	82	V	340AAA	7.3	577	BSW
14	65	185/65R14	86	H	340AAA	7.8	596	BSW
	65	195/65R14	89	H	340AAA	7.8	610	BSW
	60	185/60R14	82	H	340AAA	7.8	578	BSW
	60	195/60R14	86	H	340AAA	7.8	590	BSW
13	65	185/65R13	84	H	340AAA	7.8	570	BSW

UTQG Uniform Tire Quality Grade BSW Black Side Wall

ULTRA HIGH PERFORMANCE

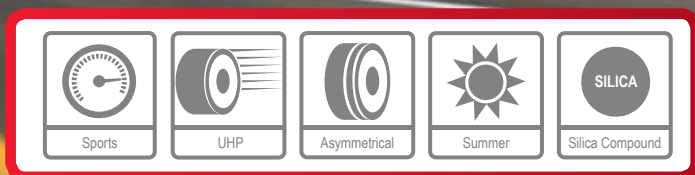

CHAMPIRO HPY

The CHAMPIRO HPY combines a dynamic and sporty drive with safety and comfort.


FEATURES & BENEFITS

NEW ASYMMETRIC PATTERN DESIGN

SAFETY: Optimal grip on wet and dry surfaces
COMFORT: Low Noise level even at high speed

TWIN STEEL BELT

Reinforced by spirally wrapped nylon stabilizes the tread area and enhances traction, high speed capability and ride quality

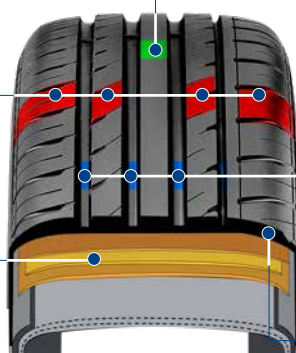

SOLID CENTER RIB

COMFORT & SAFETY: Straight line stability and steering response

FOUR WIDE LONGITUDINAL GROOVES

Ensure quick water evacuation to prevent aquaplaning



HIGH PERCENTAGE OF SILICA

Combined with reinforced tread pattern, enhance grip on wet surface and reduce the rolling resistance

CHAMPIRO HPY


ULTRA HIGH PERFORMANCE



Inch	Series	Size	Load Index	Speed Rating	UTQG	 Tread Depth mm	 Overall Diameter mm	Side Wall
20	35	255/35ZR20 XL	97	Y	300AAA	7.8	686	BSW
19	40	225/40ZR19 XL	93	Y	300AAA	7.8	663	BSW
	40	255/40ZR19	96	Y	300AAA	7.8	687	BSW
	35	225/35ZR19 XL	88	Y	300AAA	7.8	641	BSW
	35	235/35ZR19 XL	91	Y	300AAA	7.8	647	BSW
	35	255/35ZR19 XL	96	Y	300AAA	7.8	661	BSW
18	50	235/50ZR18 XL	101	Y	300AAA	7.8	695	BSW
	45	225/45ZR18	91	Y	300AAA	7.8	659	BSW
	45	245/45ZR18 XL	100	Y	300AAA	7.8	677	BSW
	45	255/45ZR18 XL	103	Y	300AAA	7.8	687	BSW
	40	205/40ZR18 XL	86	Y	300AAA	7.8	621	BSW
	40	225/40ZR18 XL	92	Y	300AAA	7.8	637	BSW
	40	235/40ZR18 XL	95	Y	300AAA	7.8	645	BSW
	40	245/40ZR18 XL	97	Y	300AAA	7.8	653	BSW
	35	255/35ZR18 XL	94	Y	300AAA	7.8	635	BSW
	35	265/35ZR18 XL	97	Y	300AAA	7.8	643	BSW
17	55	215/55ZR17	94	W	300AAA	7.8	668	BSW
	50	205/50ZR17 XL	93	W	300AAA	7.8	638	BSW
	50	225/50ZR17 XL	98	Y	300AAA	7.8	658	BSW
	50	235/50ZR17 XL	100	W	300AAA	7.8	668	BSW
	45	205/45ZR17 XL	88	W	300AAA	7.8	616	BSW
	45	215/45ZR17 XL	91	Y	300AAA	7.8	626	BSW
	45	225/45ZR17 XL	94	Y	300AAA	7.8	634	BSW
	45	235/45ZR17 XL	97	Y	300AAA	7.8	644	BSW
	45	245/45ZR17 XL	99	Y	300AAA	7.8	652	BSW
	40	245/40ZR17 XL	95	Y	300AAA	7.8	628	BSW
	40	255/40ZR17 XL	98	Y	300AAA	7.8	636	BSW
16	65	205/65R16	95	H	300AAA	8.0	672	BSW
	55	205/55ZR16 XL	94	W	300AAA	7.8	632	BSW

UTQG Uniform Tire Quality Grade BSW Black Side Wall

MILEAGE

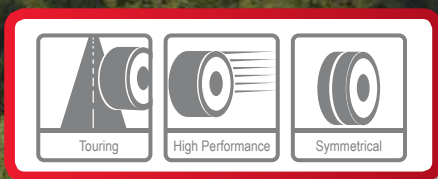

MAXTOUR

MAXTOUR offers high mileage, due to its durable and long-lasting components. The tire is designed to achieve maximum tread life without compromising performance.

FEATURES & BENEFITS



OPTIMIZED PATTERN PITCH AND STIFFNESS
Quiet and comfort



4-GROOVE DESIGN
Good drainage and Wet performance

ENHANCED TREAD COMPOUND AND LOW VOID-TO-FILL-RATIO
Extended tread life

MAXTOUR

MILEAGE



Inch	Series	Size	Load Index	Speed Rating	UTQG	 Tread Depth mm	 Overall Diameter mm	Side Wall
16	60	235/60R16	100	T	620AB	9.5	688	BSW
	65	215/65R16	98	T	620AB	9.3	686	BSW
15	60	195/60R15	88	T	620AB	9.1	615	BSW
	65	195/65R15	91	T	620AB	9.1	635	BSW
	70	235/70R15	103	T	620AB	9.1	711	BSW
14	60	185/60R14	82	T	620AB	9.0	578	BSW
	65	185/65R14	86	T	620AB	9.0	596	BSW
	70	185/70R14	88	T	620AB	9.2	616	BSW
	70	205/70R14	95	T	620AB	8.8	644	BSW
13	70	185/70R13	86	T	620AB	9.2	590	BSW
12	70	155/70R12	73	T	620AB	8.9	523	RWL
	70	165/70R12	77	T	620AB	9.0	537	RWL
	70	175/70R12	80	S	620AB	9.1	551	BSW

UTQG Uniform Tire Quality Grade BSW Black Side Wall WR White Ring RWL Raised White Letter

ALL ROUND PREMIUM COMFORT



CHAMPIRO FE1

The CHAMPIRO FE1 is GT Radial latest high performance tire, combining superb mileage, quiet and smooth drive, great handling and an eye on fuel savings.




FEATURES & BENEFITS

EDGES OF SIPES AND BLOCK

Penetrate water film and evacuate water between the tire rubber and the road

NEW GENERATION, HIGH-TECH COMPOUND

Provide great wet grip and overall performance, while maintaining comfort

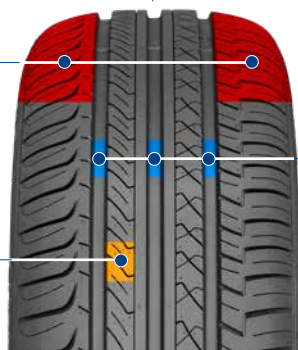

ADVANCED TREAD COMPOUND

Reduces heat generation and lowers tire rolling resistance

WIDE LONGITUDINAL GROOVES

Allow for improved performance in wet conditions and efficient water dispersement

CHAMPIRO FE1

ALL ROUND PREMIUM COMFORT



Inch	Series	Size	Load Index	Speed Rating	UTQG	Tread Depth mm	Overall Diameter mm	Side Wall
17	50	205/50ZR17	93	W	420AA	7.7	638	BSW
	50	215/50ZR17	95	W	420AA	7.7	648	BSW
	50	225/50R17	98	V	420AA	7.7	658	BSW
	50	225/50ZR17	94	W	420AA	7.7	658	BSW
	50	225/50ZR17	98	W	420AA	7.7	658	BSW
	55	205/55R17	95	V	420AA	7.7	658	BSW
	55	215/55ZR17	94	W	420AA	7.7	668	BSW
	55	215/55ZR17	98	W	420AA	7.7	668	BSW
	55	225/55ZR17	101	W	420AA	7.7	680	BSW
16	50	195/50R16	88	V	420AA	7.7	602	BSW
	55	195/55R16	87	H	420AA	7.7	620	BSW
	55	195/55R16	87	V	420AA	7.7	620	BSW
	55	195/55R16	91	V	420AA	7.7	620	BSW
	55	205/55R16	91	H	420AA	7.7	632	BSW
	55	205/55R16	91	V	420AA	7.7	632	BSW
	55	205/55R16	94	V	420AA	7.7	632	BSW
	55	205/55ZR16	94	W	420AA	7.7	632	BSW
	55	215/55R16	93	V	420AA	7.7	642	BSW
	55	215/55ZR16	97	W	420AA	7.7	642	BSW
	55	225/55ZR16	99	W	420AA	7.7	654	BSW
	60	205/60R16	96	H	420AA	7.7	652	BSW
	60	205/60R16	96	V	420AA	7.7	652	BSW
	60	215/60R16	99	V	420AA	7.7	664	BSW
15	50	195/50R15	82	H	420AA	7.7	577	BSW
	50	195/50R15	82	V	420AA	7.7	577	BSW
	55	185/55R15	82	H	420AA	7.7	585	BSW
	55	185/55R15	82	V	420AA	7.7	585	BSW
	55	195/55R15	85	H	420AA	7.7	595	BSW
	55	195/55R15	85	V	420AA	7.7	595	BSW
	60	195/60R15	88	H	420AA	7.7	615	BSW
	60	195/60R15	88	V	420AA	7.7	615	BSW
	60	205/60R15	91	V	420AA	7.7	627	BSW
	65	175/65R15	84	H	420AA	7.7	609	BSW
	65	175/65R15	84	T	420AA	7.7	609	BSW
	65	185/65R15	88	H	420AA	7.7	621	BSW
	65	185/65R15	92	T	420AA	7.7	621	BSW
	65	185/65R15	88	T	420AA	7.7	621	BSW
	65	195/65R15	91	H	420AA	7.7	635	BSW
	65	195/65R15	91	V	420AA	7.7	635	BSW
	65	195/65R15	95	T	420AA	7.7	635	BSW
	65	205/65R15	94	V	420AA	7.7	647	BSW

UTQG Uniform Tire Quality Grade BSW Black Side Wall

ALL-AROUND COMFORT



CHAMPIRO VP1

As a versatile tire, CHAMPIRO VP1 balances control, comfort, security and high mileage in all weather conditions. It is designed especially for drivers of family sedans, wagons and crossovers.


FEATURES & BENEFITS

OPTIMIZED TREAD BLOCK DESIGN WITH INTEGRAL LATERAL GROOVES AND SIPES

Provides better wet handling and reduces road noise

CONTINUOUS CIRCUMFERENTIAL CENTER RIB

Improves straight line stability and uniform tread life

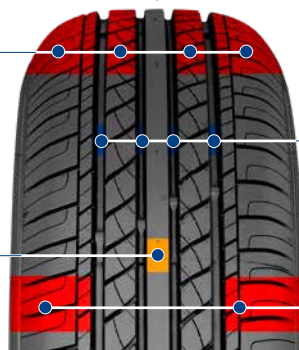

ADVANCED TREAD COMPOUND

Generates excellent grip in wet and dry conditions, and delivers reduced rolling resistance for better fuel efficiency

FOUR DEEP, WIDE CIRCUMFERENTIAL TREAD GROOVES

Short braking distances on wet and dry roads, REDUCED AQUAPLANING

STABLE SHOULDER BLOCK WITH LATERAL GROOVE

Reduces tread block movement and ensures quick steering response and cornering grip

CHAMPIRO VP1

ALL-AROUND COMFORT



Inch	Series	Size	Load Index	Speed Rating	UTQG	Tread Depth mm	Overall Diameter mm	Side Wall	
18	60	P225/60R18	99	H	420AB	8.1	727	BSW	
	60	P235/60R18	102	H	420AB	8.1	739	BSW	
	65	P235/65R18	104	T	420AB	8.1	763	BSW	
17	50	225/50R17	94	V	420AB	8.1	658	BSW	
	50	215/50R17	95	V	420AB	8.0	648	BSW	
	55	215/55R17	94	V	420AB	8.0	668	BSW	
	55	235/55R17	99	H	420AB	8.1	690	BSW	
	60	P215/60R17	95	T	420AB	8.0	690	BSW	
	60	P225/60R17	98	T	420AB	8.1	702	BSW	
	60	235/60R17	102	T	420AB	8.1	714	BSW	
	65	225/65R17	102	H	420AB	8.1	724	BSW	
	65	P215/65R17	98	T	420AB	8.0	712	BSW	
	65	P235/65R17	103	T	420AB	8.1	738	BSW	
16	55	195/55R16	91	H	420AB	7.9	620	BSW	
	55	205/55R16	91	V	420AB	8.0	632	BSW	
	60	205/60R16	92	H	420AB	7.9	652	BSW	
	60	215/60R16	95	H	420AB	8.0	664	BSW	
	60	225/60R16	98	H	420AB	8.1	676	BSW	
	60	235/60R16	100	H	420AB	8.1	688	BSW	
	65	215/65R16	98	T	420AB	8.0	686	BSW	
	65	235/65R16	103	T	420AB	8.1	712	BSW	
15	50	195/50R15	82	V	420AB	7.9	577	BSW	
	55	185/55R15	82	H	420AB	7.8	585	BSW	
	55	195/55R15	85	H	420AB	7.9	595	BSW	
	60	185/60R15	84	H	420AB	7.8	603	BSW	
	60	195/60R15	88	H	420AB	7.8	615	BSW	
	60	205/60R15	91	H	420AB	7.9	627	BSW	
	60	215/60R15	94	H	420AB	8.0	639	BSW	
	65	175/65R15	84	H	420AB	7.6	609	BSW	
	65	185/65R15	88	H	420AB	7.9	621	BSW	
	65	195/65R15	91	H	420AB	7.8	635	BSW	
	65	205/65R15	94	H	420AB	7.9	647	BSW	
	65	215/65R15	96	H	420AB	8.0	661	BSW	
	14	60	185/60R14	82	H	420AB	7.7	578	BSW
		60	195/60R14	86	H	420AB	7.8	590	BSW
65		155/65R14	75	T	420AB	7.4	558	BSW	
65		165/65R14	79	T	420AB	7.5	570	BSW	
65		175/65R14	82	T	420AB	7.6	584	BSW	
65		185/65R14	86	H	420AB	7.7	596	BSW	
65		195/65R14	89	T	420AB	7.7	610	BSW	
70		165/70R14	81	T	420AB	7.5	588	BSW	
70		175/70R14	88	T	420AB	7.6	602	BSW	
70		185/70R14	88	H	420AB	7.7	616	BSW	
70		195/70R14	91	T	420AB	7.8	630	BSW	
70		205/70R14	98	T	420AB	7.9	644	BSW	
75		185/75R14	89	T	420AB	7.5	634	BSW	
13	60	175/60R13	77	H	420AB	7.7	540	BSW	
	65	155/65R13	73	T	420AB	7.4	532	BSW	
	65	165/65R13	77	T	420AB	7.5	544	BSW	
	70	145/70R13	71	T	420AB	7.3	534	BSW	
	70	155/70R13	75	T	420AB	7.4	548	BSW	
	70	165/70R13	79	T	420AB	7.5	562	BSW	
	70	175/70R13	82	T	420AB	7.6	576	BSW	
	70	185/70R13	86	T	420AB	7.7	590	BSW	
12	80	165/80R13	83	H	420AB	7.5	594	BSW	
	80	155/80R12	77	T	420AB	7.4	553	BSW	

UTQG Uniform Tire Quality Grade BSW Black Side Wall

FOR EVERY WEATHER IN ALL SEASONS



4SEASONS

4SEASONS is a good performance tire offers excellent mileage for long lasting life (multiple seasons), also maintain grip and safe driving performances across the entire temperature spectrum.

FEATURES & BENEFITS

DUAL ULTRA-WIDE GROOVES
Ensures fast water evacuation, resistance to aquaplaning, and short braking distances on wet surfaces

STIFF SHOULDERS
Provide fast steering response, excellent handling, and the "summer tire" stability feeling

WIDE CENTRAL RIB
For high speed stability and dry road comfort



NEW ALL SEASONS "FULL SILICA" COMPOUND
Ensures consistent grip across wide range of temperatures, and a long lasting mileage

MULTIPLE DEEP SIPES
Ensures excellent grip on snow and ice surfaces, for firm accelerations and short stopping distances

4SEASONS


FOR EVERY WEATHER IN ALL SEASONS



Inch	Series	Size	Load Index	Speed Rating	UTQG	Tread Depth mm	Overall Diameter mm	Side Wall
17	45	225/45R17	94	V	440AA	8.4	634	BSW
	50	205/50R17	93	V	440AA	8.4	638	BSW
	50	225/50R17	98	V	440AA	8.4	658	BSW
	55	225/55R17	101	V	440AA	8.4	680	BSW
	55	235/55R17	103	V	440AA	8.4	690	BSW
	60	215/60R17	96	V	440AA	8.4	690	BSW
	45	225/45R17	94	V	440AA	8.4	634	BSW
	50	205/50R17	93	V	440AA	8.4	638	BSW
	50	225/50R17	98	V	440AA	8.4	658	BSW
	55	225/55R17	101	V	440AA	8.4	680	BSW
	55	235/55R17	103	V	440AA	8.4	690	BSW
16	60	215/60R17	96	V	440AA	8.4	690	BSW
	55	195/55R16	87	H	440AA	8.4	620	BSW
	55	205/55R16	94	V	440AA	8.4	632	BSW
	55	215/55R16	97	V	440AA	8.4	642	BSW
	60	205/60R16	92	H	440AA	8.4	652	BSW
	65	215/65R16	102	V	440AA	8.4	686	BSW
	55	195/55R16	87	H	440AA	8.4	620	BSW
	55	205/55R16	94	V	440AA	8.4	632	BSW
	55	215/55R16	97	V	440AA	8.4	642	BSW
15	60	205/60R16	92	H	440AA	8.4	652	BSW
	65	215/65R16	102	V	440AA	8.4	686	BSW
	50	195/50R15	82	H	440AA	8.4	577	BSW
	55	185/55R15	82	H	440AA	8.4	585	BSW
	55	195/55R15	85	H	440AA	8.4	595	BSW
	60	185/60R15	88	H	440AA	8.4	603	BSW
	60	195/60R15	88	H	440AA	8.4	615	BSW
	65	175/65R15	84	T	440AA	8.4	609	BSW
	65	185/65R15	88	H	440AA	8.4	621	BSW
	65	195/65R15	91	H	440AA	8.4	635	BSW
	50	195/50R15	82	H	440AA	8.4	577	BSW
	55	185/55R15	82	H	440AA	8.4	585	BSW
	55	195/55R15	85	H	440AA	8.4	595	BSW
	60	185/60R15	88	H	440AA	8.4	603	BSW
	60	195/60R15	88	H	440AA	8.4	615	BSW
14	65	175/65R15	84	T	440AA	8.4	609	BSW
	65	185/65R15	88	H	440AA	8.4	621	BSW
	65	195/65R15	91	H	440AA	8.4	635	BSW
	60	185/60R14	82	H	440AA	8.4	578	BSW
	65	175/65R14	86	T	440AA	8.4	584	BSW
	65	185/65R14	86	T	440AA	8.4	596	BSW
	70	165/70R14	81	H	440AA	8.4	588	BSW

UTQG Uniform Tire Quality Grade BSW Black Side Wall

COMFORT- ALL GROUND PERFORMANCE



CHAMPIRO ECO

New generation of passenger car summer comfort tire.

FEATURES & BENEFITS

NEW INNER LINER FORMULA

Maintains air pressure over a longer period, delivers high fuel efficiency with reduced CO2 emissions

NEW ADVANCED COMPOUND

Excellent grip on wet and dry roads maintains handling and braking properties at the highest level



SYMMETRICAL 3 GROOVE TREAD CONSTRUCTION

Provides excellent stability and safety whilst preventing aquaplanning



WAVE SHAPED SIPING

Works as noise frequency disturbers to provide a very quiet ride

CHAMPIRO ECO

COMFORT- ALL GROUND PERFORMANCE




Inch	Series	Size	Load Index	Speed Rating	UTQG	 Tread Depth mm	 Overall Diameter mm	Side Wall
16	65	205/65R16	95	H	300AA	8.0	672	BSW
	60	205/60R16	92	H	300AA	8.0	652	BSW
	60	215/60R16	95	H	300AA	7.0	664	BSW
15	70	205/70R15	96	T	300AA	8.0	669	BSW
	65	175/65R15	84	H (T)	300AA	7.0	605	BSW
	65	185/65 R15	88	H	300AA	8.0	617	BSW
	65	195/65R15	91	H	300AA	8.0	635	BSW
	65	205/65R15	94	H	300AA	8.0	647	BSW
	65	215/65R15	96	H	300AA	8.0	661	BSW
	60	175/60R15	81	H	300AA	7.0	591	BSW
	60	185/60R15 XL	88	H	300AA	7.0	603	BSW
	60	195/60R15	88	H	300AA	8.0	615	BSW
	60	195/60R15 XL	92	H	300AA	8.0	615	BSW
	60	205/60R15	91	H	300AA	8.0	627	BSW
14	80	185/80R14	91	S	300AA	8.0	652	BSW
	70	165/70R14 XL	85	T	300AA	7.0	588	BSW
	70	175/70R14	84	H	300AA	7.0	602	BSW
	70	185/70R14	88	H	300AA	8.0	616	BSW
	70	195/70R14	91	H	300AA	8.0	630	BSW
	65	155/65R14	75	T	300AA	7.0	558	BSW
	65	165/65R14	79	T	300AA	7.0	570	BSW
	65	175/65R14	82	T	300AA	7.0	584	BSW
	65	175/65R14 XL	86	T	300AA	7.0	584	BSW
	65	185/65R14	86	H	300AA	8.0	596	BSW
	65	195/65R14	89	H	300AA	8.0	610	BSW
	60	185/60R14	82	H	300AA	8.0	578	BSW
	60	195/60R14	86	H	300AA	8.0	590	BSW
13	80	135/80R13	70	T	300AA	7.0	546	BSW
	80	145/80R13	75	T	300AA	7.0	562	BSW
	80	155/80R13	79	T	300AA	7.0	578	BSW
	80	165/80R13	83	T	300AA	7.0	594	BSW
	70	145/70R13	71	T	300AA	7.0	534	BSW
	70	155/70R13	75	T	300AA	7.0	548	BSW
	70	165/70R13	79	T	300AA	7.0	562	BSW
	70	175/70R13	82	H	300AA	7.0	576	BSW
	70	185/70R13	86	H	300AA	8.0	590	BSW
	65	155/65R13	73	T	300AA	7.0	532	BSW
	65	165/65R13	77	T	300AA	7.0	544	BSW
	65	175/65R13	80	T	300AA	7.0	558	BSW
	60	175/60R13	77	H	300AA	7.0	540	BSW
	60	185/60R13	80	H	300AA	8.0	552	BSW
	12	70	175/70R12	80	H	300AA	7.0	551

UTQG Uniform Tire Quality Grade BSW Black Side Wall


SUV & 4X4



A wide-angle photograph of a dirt road in a rural, hilly landscape. The road is reddish-brown and curves through the foreground. The background features rolling green hills and a prominent mountain peak under a blue sky with scattered white and grey clouds. The text is overlaid in the lower-middle section of the image.

**SPECIFICALLY DESIGNED FOR THE
NEEDS OF YOUR SUV AND 4X4,
WHETHER YOU ARE LOOKING FOR
HIGHWAY, OFF-ROAD,
OR ALL-AROUND DRIVING**

ULTRA HIGH PERFORMANCE

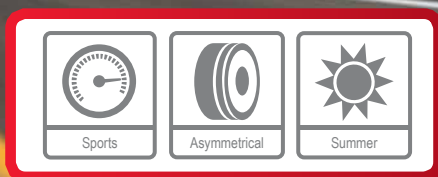

CHAMPIRO HPY (SUV)

The CHAMPIRO HPY has a asymmetric pattern design consisting of an inner and outer shoulder area.


FEATURES & BENEFITS

HIGH PERCENTAGE OF SILICA

Combined with reinforced tread pattern, enhance grip on wet surface and reduce the rolling resistance

TWIN STEEL BELT

Reinforced by spirally wrapped nylon stabilizes the tread area and enhances traction, high speed capability and ride quality

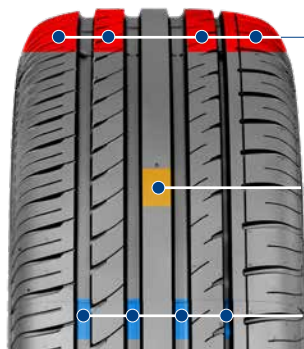

ASYMMETRIC TREAD PATTERN

Designed with stable shoulder elements and larger tread blocks provide responsive handling, high speed stability and traction in dry and wet surface

SOLID CENTER RIB

Ensures good directional stability and fast steering response

FOUR WIDE LONGITUDINAL GROOVES

Ensure quick water evacuation to prevent aquaplaning

CHAMPIRO HPY (SUV)

ULTRA HIGH PERFORMANCE



Inch	Series	Size	Load Index	Speed Rating	UTQG	 Tread Depth mm	 Overall Diameter mm	Side Wall
20	55	275/55R20 XL	117	V	300AAA	7.8	810	BSW
	50	265/50R20 XL	111	W	300AAA	7.8	774	BSW
	45	255/45ZR20	101	Y	300AAA	7.8	738	BSW
	40	275/40R20 XL	106	Y	300AAA	7.8	728	BSW
19	55	235/55R19 XL	105	W	300AAA	7.8	741	BSW
	50	255/50ZR19 XL	107	Y	300AAA	7.8	739	BSW
	45	275/45R19 XL	108	Y	300AAA	7.8	731	BSW
18	60	235/60R18 XL	107	V	300AAA	7.8	739	BSW
	55	235/55ZR18 XL	104	W	300AAA	7.8	715	BSW
	55	255/55ZR18 XL	109	Y	300AAA	7.8	737	BSW
17	65	225/65R17	102	V	300AAA	7.8	724	BSW
	65	235/65R17 XL	108	V	300AAA	7.8	738	BSW
	65	245/65R17 XL	111	V	300AAA	7.8	750	BSW
	60	215/60R17 XL	100	V	300AAA	7.8	690	BSW
	55	235/55R17 XL	103	W	300AAA	7.8	690	BSW

UTQG Uniform Tire Quality Grade BSW Black Side Wall

PREMIUM PERFORMANCE SUV



CHAMPIRO 528

CHAMPIRO 528 has a modern appearance that goes along with its top-level performance. This premium SUV tire delivers the control, handling and stability that performance SUV drivers demand.




FEATURES & BENEFITS

SOLID CENTER CIRCUMFERENTIAL RIB

Outstanding directional stability and steering response

RIM PROTECTOR

Protects wheels from curb damage



HIGH ANGLE GROOVE ARRANGEMENT

Enhanced water dispersion and wet handling traction

ADVANCED VARIABLE PITCH TREAD DESIGN

Comfortable and quiet drive

CHAMPIRO 528

PREMIUM PERFORMANCE SUV



Inch	Series	Size	Load Index	Speed Rating	UTQG	Tread Depth mm	Overall Diameter mm	Side Wall
20	45	275/45R20	110/114	V	300AA	8.4	756	BSW
	50	285/50R20	116	V	300AA	8.5	794	BSW
	55	275/55R20	117	V	300AA	8.6	810	BSW
19	50	255/50R19	103	V	300AA	8.4	739	BSW
18	55	255/55R18	109	V	300AA	8.4	737	BSW
	60	235/60R18	103	V	300AA	8.3	739	BSW

UTQG Uniform Tire Quality Grade BSW Black Side Wall



A Wide tread contact patch provides excellent grip, maneuverability and braking




C Circumferential central rib for high speed stability and control




B Streamlined pattern and dual circumferential grooves for ultra-efficient water evacuation and wet traction



D Robust shoulder pattern design provides tread stability, efficient response and precise cornering

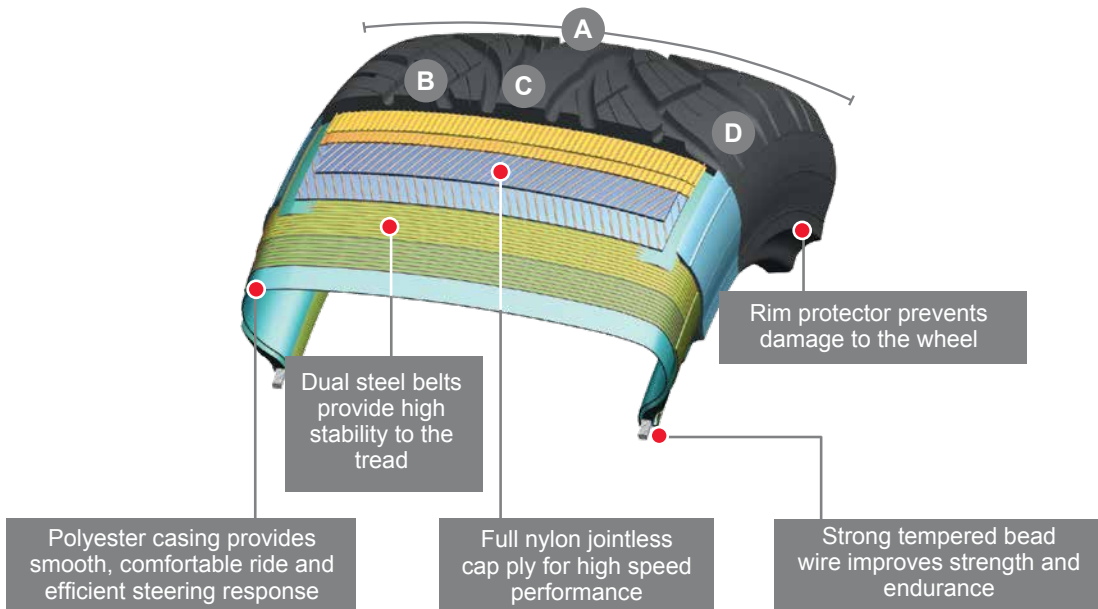

HIGHWAY PERFORMANCE

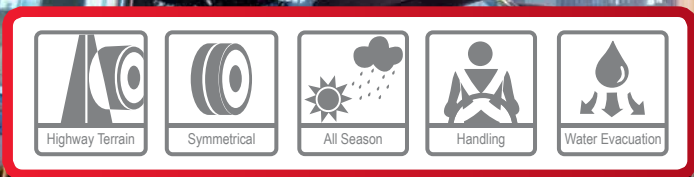

SAVERO HT2

SAVERO HT2 is a premium all-season highway light truck and SUV tire. It features a superior tread design that provides strong handling in both wet and dry condition, delivering a comfortable ride and long mileage.

FEATURES & BENEFITS

SUPERIOR TREAD PATTERN DESIGN
Excellent handling and ride comfort

OPTIMIZED CASING TENSION TECHNOLOGY
Excellent balance of dry and wet handling



NEW TREAD COMPOUND
Outstanding grip and stability

ADVANCED NOISE CANCELLING TECHNOLOGY IN TREAD BLOCK DESIGN
Effectively reduces road noise

SAVERO HT2


HIGHWAY PERFORMANCE



Inch	Series	Size	Load Index	Speed Rating	UTQG	Tread Depth mm	Overall Diameter mm	Side Wall
20	50	285/50R20	116	V	520AB	8.2	794	BSW
	55	P255/55R20	107	H	520AB	8.2	788	BSW
	55	P275/55R20	111	H	520AB	8.2	810	BSW
	60	P275/60R20	114	S	520AB	8.2	838	OWL
19	55	P245/55R19	103	S	520AB	8.2	753	BSW
18	55	255/55R18	109	V	520AB	8.2	737	BSW
	60	235/60R18	107	V	520AB	8.2	739	BSW
	60	P245/60R18	104	H	520AB	8.2	751	BSW
	60	P265/60R18	109	T	520AB	8.2	775	OWL
	65	P235/65R18	104	T	520AB	8.2	763	OWL
17	65	225/65R17	102	H	520AB	8.2	724	BSW
	65	P235/65R17	103	T	520AB	8.2	738	BSW
	65	P245/65R17	105	T	520AB	8.2	750	BSW
	65	P255/65R17	108	S	520AB	8.2	764	BSW
	65	P265/65R17	110	T	520AB	8.2	776	OWL
	70	LT265/70R17	121/118	S	-	10.2	804	OWL
	70	P265/70R17	113	T	520AB	8.2	804	OWL
16	70	275/70R16	114	H	520AB	8.2	792	OWL
	70	P215/70R16	99	T	520AB	8.2	708	BSW
	70	P225/70R16	101	T	520AB	8.2	722	OWL
	70	P235/70R16	104	T	520AB	8.2	736	OWL
	70	P245/70R16	106	T	520AB	8.2	750	OWL
	70	P255/70R16	109	T	520AB	8.2	764	OWL
	70	P265/70R16	111	T	520AB	8.2	778	OWL
	75	LT225/75R16	115/112	R	-	10.2	744	BSW
	75	LT245/75R16	120/116	R	-	10.2	774	OWL
	75	P225/75R16	106	S	520AB	8.2	744	OWL
	75	P235/75R16	106	T	520AB	8.2	758	BSW
	75	P245/75R16	109	T	520AB	8.2	774	OWL
	75	P265/75R16	114	T		8.2	804	OWL
	85	LT235/85R16	120/116	R	-	10.2	806	BSW
15	70	255/70R15C LT	112/110	S	-	10.2	739	OWL
	70	P215/70R15	97	S	520AB	8.2	683	BSW
	75	LT235/75R15	104/101	R	-	10.2	733	OWL
	75	P235/75R15	105	T	520AB	8.2	733	OWL
		31×10.50R15LT	109	R	-	10.2	775	OWL

UTQG Uniform Tire Quality Grade BSW Black Side Wall OWL Outline White Letter

LIGHT TRUCK AND SUV

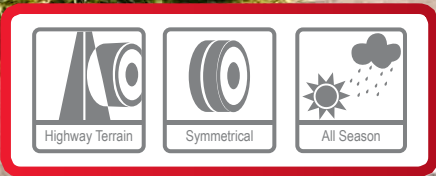

SAVERO HT PLUS

SAVERO HT PLUS is designed especially for pick-ups, light trucks, and SUVs to deliver a high degree of both comfort and control and long mileage.

FEATURES & BENEFITS

FOUR VERTICAL CIRCUMFERENTIAL GROOVE
High-speed performance and excellent water dispersion

INTERLACED STREAMLINE HORIZONTAL GROOVES, ASSIST WITH COMPLEX STRIAE EDGE GROOVES
Improved traction also suitable for snow driving





OPEN SHOULDER GROOVES
Better heat desparation and turning capability

"S" SHAPE PERFECT STRUCTURE DESIGN
Improved handling and durability

SAVERO HT PLUS

LIGHT TRUCK AND SUV



Inch	Series	Size	Load Index	Speed Rating	UTQG	 Tread Depth mm	 Overall Diameter mm	Side Wall
17	60	235/60R17	102	H	460AA	8.5	714	BSW
	65	265/65R17	112	T	460AB	10.3	776	BSW
	70	225/70R17	108	T	460AB	10.3	748	OWL
16	70	255/70R16	111	T	460AA	10.3	764	OWL
15	80	215/80R15	102	S	460AB	10.2	725	BSW

UTQG Uniform Tire Quality Grade **BSW** Black Side Wall **OWL** Outline White Letter

HIGHWAY TERRAIN



SAVERO SUV

GT Radial SAVERO SUV is designed for on-road driving that suit modern SUV and urban crossover vehicles. By using the latest compounding and design technologies to achieve key performance like road handling, fuel efficient, comfort/quiet ride and safety.

FEATURES & BENEFITS

STIFF SHOULDER BLOCKS
Provide cornering stability, excellent traction and raking and enhance steering precision as well

4 WIDE LONGITUDINAL GROOVES
Provide superior wet performance by rapid drainage and reduce aquaplaning



GEOMETRICALLY OPTIMIZED SIPES
Small tread blocks combination with lateral sipes to achieve low road rolling noise and further improved wet grip performance

STIFF CIRCUMFERENTIAL RIBS
Provide optimal baking, good directional and driving stability

SAVERO SUV


HIGHWAY TERRAIN



Inch	Series	Size	Load Index	Speed Rating	UTQG	Tread Depth mm	Overall Diameter mm	Side Wall
20	50	245/50R20	102	V	380AA	8.0	754	BSW
	50	265/50R20	107	V	380AA	8.0	774	BSW
	50	285/50R20	112	V	380AA	8.0	794	BSW
19	55	225/55R19	99	V	380AA	8.0	731	BSW
18	65	225/65R18	103	H	380AA	8.0	749	BSW
	65	235/65R18	106	H	380AA	8:02	763	BSW
	60	225/60R18	100	H	380AA	8.0	727	BSW
	60	235/60R18 XL	107	V	380AA	8.0	739	BSW
	60	265/60R18	110	H	380AA	8.0	775	BSW
	60	285/60R18	116	V	380AA	8.0	799	BSW
	55	215/55R18 XL	99	V	380AA	8.0	693	BSW
	55	225/55R18	98	V	380AA	8.0	705	BSW
17	55	235/55R18	100	V	380AA	8.0	715	BSW
	65	225/65R17	102	H	380AA	8.0	724	BSW
	65	235/65R17 XL	108	V	380AA	8.0	738	BSW
	65	245/65R17 XL	111	H	380AA	8.0	750	BSW
	65	265/65R17	112	H	380AA	8.0	776	BSW
	60	215/60R17	96	H	380AA	8.0	690	BSW
	60	225/60R17	99	H	380AA	8:01	702	BSW
	60	235/60R17	102	H	380AA	8:02	714	BSW
	60	255/60R17	106	V	380AA	8:04	738	BSW
	55	215/55R17	94	V	380AA	8:00	668	BSW
16	55	235/55R17	99	V	380AA	8.0	690	BSW
	70	215/70R16	100	H	380AA	8.0	708	BSW
	70	225/70 16	103	H	380AA	8.0	722	BSW
	70	235/70R16	106	H	380AA	8.0	736	BSW
	70	245/70R16 XL	111	H	380AA	8.0	750	BSW
	70	265/70R16	112	H	380AA	8.0	778	BSW
	70	275/70R16	114	H	380AA	8.0	792	BSW
	65	215/65R16	98	H	380AA	8.0	686	BSW
	65	255/65R16	109	H	380AA	8.0	738	BSW
	60	215/60R16	95	H	380AA	8.0	664	BSW
15	60	235/60R16	100	H	380AA	8.0	688	BSW
	70	205/70R15	96	H	380AA	7.0	669	BSW
	70	215/70R15	98	T	380AA	8.0	683	BSW
	70	255/70R15	108	H	380AA	8.0	739	BSW
	70	265/70R15	112	H	380AA	8.0	753	BSW

UTQG Uniform Tire Quality Grade BSW Black Side Wall

MUD TERRAIN

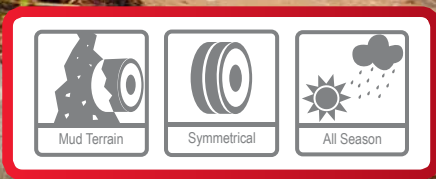

SAVERO KOMODO M/T PLUS

The tire offers impressive off road performance in standard (OEM), and heavily modified (4x4 tuning) vehicle. Savero Komodo M/T Plus tire can handle wide variety of road conditions, adverse weather and extreme driving demand.


FEATURES & BENEFITS

STONE EJECTOR

Good for self-cleaning effects and protection on the shoulder groove area

ZIG ZAG BLOCK

Provides great traction in mud terrain and crawling on uneven rock terrain

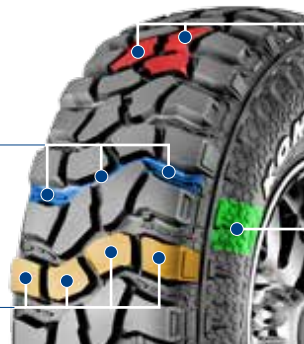

INTERLOCK BLOCK

Provides further reduction of on road noise & increase driver comfort, coupled with reduction of uneven wear



KOMODO CLAWS WITH SCALES

Increase sidewall resistance to penetrations & punctures by stone hazard and other objects

SAVERO KOMODO M/T PLUS


MUD TERRAIN



Inch	Series	Size	Load Index	Speed Rating	UTQG	 Tread Depth mm	 Overall Diameter mm	Side Wall
17	70	LT265/70R17	121/118	Q	-	15.2	810	RWL
16	75	LT245/75R16	120/116	Q	-	14.1	780	RWL
	75	LT265/75R16	112/109	Q	-	15.0	810	RWL
15	75	LT195/75R15	95/92	Q	-	14.1	677	RWL
	75	LT235/75R15	104/101	Q	-	14.1	739	RWL
		30x9.50R15 LT	104	Q	-	15.1	750	RWL
		31x10.50R15 LT	109	Q	-	15.1	781	RWL
		33x10.5R15 LT	114	Q	-	15.1	832	RWL
		33x12.5R15 LT	108	Q	-	16.7	832	RWL
14		27x8.50R14 LT	95	Q	-	14.1	678	RWL

UTQG Uniform Tire Quality Grade RWL Raised White Letter

MUD TERRAIN

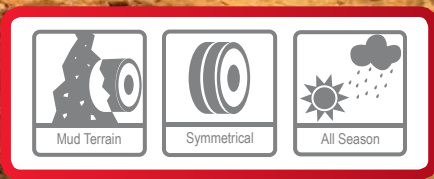

SAVERO M/T

The indispensable companion in your quest for adventures.

FEATURES & BENEFITS

DOUBLE STEEL BELT CONSTRUCTION

Keeping the tread firmly in contact with even heavy duty conditions



SPECIALLY FORMULATED TREAD COMPOUND

Highly resistant to cut & chip, results in superior performance on the off-road terrain



WIDE LUG ANGLE GROOVES ON SHOULDER

Provide superb self cleaning capability and excellent traction on muddy surface
Provide extra toughness

SAVERO M/T

MUD TERRAIN



Inch	Series	Size	Load Index	Speed Rating	UTQG	 Tread Depth mm	 Overall Diameter mm	Side Wall
15	75	LT235/75R15	104/101	Q	-	14.0	738	RWL
		31X10.50R15 LT	109	Q	-	15.1	779.2	OWL
		33X12.50R15 LT	108	Q	-	16.8	831.4	OWL
16	85	LT235/85R16	120/116	Q	-	14.1	812.3	RWL
	75	LT245/75R16	120/116	Q	-	14.1	780	RWL
	75	LT265/75R16	112/109	Q	-	14.9	810	RWL

UTQG Uniform Tire Quality Grade **RWL** Raised White Letter **OWL** Outline White Letter

OFF ROAD MAXIMUM TERRAIN



ADVENTURO M/T

ADVENTURO M/T is a maximum traction tire that is the most aggressive and rugged tire in GT Radial line designed with large, pronounced tread blocks. It provides superb traction on rough, muddy and snowy terrain.

FEATURES & BENEFITS

HIGH VOID RATIO AND PYRAMIDAL SHAPED TREAD ELEMENTS

Outstanding directional stability and steering response

REINFORCED CASING CONSTRUCTION

Superior overall resistance to damage



AGGRESSIVE PATTERN DESIGN

Outstanding traction in all weather conditions



SPECIAL CASING PROFILE AND SOLID SHOULDER PATTERN

Enhanced traction and cornering

ADVENTURO M/T


OFF ROAD MAXIMUM TERRAIN



Inch	Series	Size	Load Index	Speed Rating	 Tread Depth mm	 Overall Diameter mm	Side Wall
16	70	305/70R16LT	118/115	Q	14.6	840	OWL
	75	225/75R16LT	115/112	Q	12.6	750	OWL
	75	245/75R16LT	120/116	Q	14.6	780	OWL
	75	265/75R16LT	123/120	Q	14.6	810	OWL
	75	285/75R16LT	122/119	Q	14.6	840	OWL
	85	235/85R16LT	120/116	Q	14.6	812	OWL
15	75	LT235/75R15	104/101	S	14.6	739	OWL
		31×10.50R15LT	109	Q	14.6	781	OWL
		33×12.50R15LT	108	Q	14.6	832	OWL

OWL Outline White Letter

ADVANCED ALL-TERRAIN

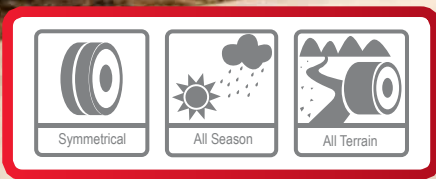

ADVENTURO AT³

The ADVENTURO AT3 is an all-terrain tire designed for light truck and SUV drivers seeking aggressive looks with civilized on-road manners. The tire provides excellent handling and wet grip, with a comfortable ride on-road and superb off-road capability.

FEATURES & BENEFITS

INTERLOCKED TREAD BLOCKS AND S-SHAPED CENTRAL RIB

Delivers excellent handling stability and improved grip on soft or loose surfaces

FIVE-PITCH PATTERN TECHNOLOGY

Helps reduce road noise for a quieter and more comfortable ride



ENHANCED TREAD COMPOUND

Provides benefits wet and dry grip, longer tread life, and cut / chip resistance

3D GROOVES WITH CHAMFERED EDGES

Consistent off-road performance with reduced stone-drilling

RIM PROTECTOR

Defends wheel against curb damage

ADVENTURO AT³


ADVANCED ALL-TERRAIN



Inch	Series	Size	Load Index	Speed Rating	UTQG	Tread Depth mm	Overall Diameter mm	Side Wall
20	50	265/50R20	111	T	520AB	10.6	774	BSW
	55	P275/55R20	111	H	520AB	10.6	810	BSW
	60	LT265/60R20	121/118	S	-	12.6	826	OWL
18	60	P265/60R18	109	T	520AB	10.6	775	OWL
	65	LT275/65R18	123/120	S	-	12.6	815	OWL
	65	LT285/65R18	125/122	S	-	12.6	827	OWL
	65	P265/65R18	112	S	520AB	10.6	801	OWL
	65	P275/65R18	114	T	520AB	10.6	815	OWL
	70	LT265/70R18	124/121	S	-	12.6	829	OWL
	70	LT275/70R18	125/122	S	-	12.6	843	OWL
	17	65	P245/65R17	105	T	520AB	10.6	750
65		P265/65R17	110	T	520AB	10.6	776	OWL
70		LT245/70R17	119/116	S	-	12.6	776	OWL
70		LT265/70R17	121/118	S	-	12.6	804	OWL
70		LT275/70R17	114/110	R	-	12.6	818	OWL
70		LT285/70R17	121/118	S	-	12.6	832	OWL
70		P265/70R17	113	T	520AB	10.6	804	OWL
75		LT245/75R17	121/118	S	-	12.6	800	OWL
80		LT235/80R17	120/117	S	-	12.6	808	OWL
16		70	245/70R16	111	T	520AB	10.6	750
	70	255/70R16	111	T	520AB	10.6	764	OWL
	70	P235/70R16	104	T	520AB	10.6	736	OWL
	70	P265/70R16	111	T	520AB	10.6	778	OWL
	75	LT225/75R16	115/112	S	-	12.6	744	OWL
	75	LT245/75R16	120/116	S	-	12.6	774	OWL
	75	LT265/75R16	112/109	S	-	12.6	804	OWL
	75	LT265/75R16	123/120	S	-	12.6	804	OWL
	75	LT285/75R16	126/123	R	-	12.6	834	OWL
	75	P225/75R16	106	T	520AB	10.6	744	OWL
	75	P245/75R16	109	T	520AB	10.6	774	OWL
	85	LT215/85R16	115/112	S	-	12.6	772	OWL
	85	LT235/85R16	120/116	S	-	12.6	806	BSW
		205R16C LT	110/108	S	-	12.6	736	OWL
15	65	205/65R15	94	H	520AB	10.6	647	BSW
	70	205/70R15	96	T	520AB	10.6	669	BSW
	75	P235/75R15	105	S	520AB	10.6	733	OWL
		31x10.50R15LT	109	S	-	12.6	775	OWL

UTQG Uniform Tire Quality Grade OWL Outline White Letter BSW Black Side Wall

ALL-TERRAIN

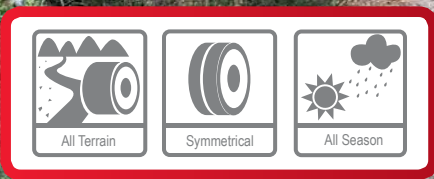

ADVENTURO A/T

An all-terrain tire for light trucks and SUVs designed to provide a great balance of highway and off-highway use for drivers who experience both conditions. The robust tread block design with shoulder-to-shoulder sipes provides excellent traction and cornering grip.

FEATURES & BENEFITS

PARTICULAR COMPOUND AND STRUCTURE DESIGN, SUPER DEEP GROOVES
Extend tire's life

UNIQUE BLOCK TREAD DESIGN WITH MULTIPLE SIPES
Extra off road traction





WIDE TREAD PATTERN WITH DEEP SOLID BLOCKS AND LUGS
Delivers superior handling and extended tread life

OPEN SHOULDER DESIGN WITH WIDE GROOVES
Improves anti-hydroplaning capability and provides enhanced wet grip performance

ADVENTURO A/T

ALL-TERRAIN



Inch	Series	Size	Load Index	Speed Rating	UTQG	 Tread Depth mm	 Overall Diameter mm	Side Wall
16	70	LT225/70R16	102/99	S	-	10.7	722	OWL
	70	P275/70R16	114	T	400AB	10.2	792	OWL
	75	LT265/75R16	112/109	S	-	13.2	804	OWL
	85	LT235/85R16	120/116	S	-	13.1	806	BSW
15	75	LT235/75R15	104/101	S	-	12.1	733	OWL
		30×9.50R15LT	104	S	-	12.2	750	OWL
		31×10.50R15LT	109	S	-	12.6	775	OWL

UTQG Uniform Tire Quality Grade **BSW** Black Side Wall **OWL** Outline White Letter

ALL TERRAIN



SAVERO A/T PLUS

Equipped for the best and worst driving conditions. With its aggressive tread, it will also grab attention.

FEATURES & BENEFITS

OPTIMIZED ALL TERRAIN TREAD PATTERN

Maximum traction and reduced noise in all driving conditions



EXTRA WIDE FOOTPRINT

Provides even wear throughout the life of the tire

ROBUST CONSTRUCTION, DOUBLE STEEL BELTS WITH POLYESTER CARCASS

Enhanced tread strength delivering excellent steering response and mileage performance

SAVERO A/T PLUS

ALL TERRAIN



Inch	Series	Size	Load Index	Speed Rating	UTQG	Tread Depth mm	Overall Diameter mm	Side Wall
18	60	255/60R18 XL	112	H	460AB	11.2	763	RBL
	60	265/60R18	110	H	460AB	11.2	775	RBL
17	70	LT225/70R17	110/107	S	-	10.7	748	OWL
	65	245/65R17	107	T	460AB	11.2	754	OWL
	65	255/65R17	110	T	460AB	11.2	764	OWL
	65	265/65R17	112	T	460AB	11.2	776	RBL
	65	275/65R17	115	H	360AB	11.2	790	RBL
	60	265/60R17	108	T	460AB	11.2	749	RBL
	16	75	225/75R16	104	T	460AB	10.8	748.3
75		245/75R16	111	T	460AB	11.2	774	RBL
75		265/75R16	116	T	460AB	12.2	804	RBL
70		245/70R16	107	T	460AB	11.2	754	RBL
70		245/70R16 XL	111	T	460AB	11.2	754.4	RBL
70		255/70R16	111	T	460AB	11.2	764	OWL
70		265/70R16	112	T	460AB	11.6	781.8	RBL
70		275/70R16	114	T	460AB	11.6	792	OWL
60		275/60R16	109	H	460AB	11.2	736.6	RBL
15	82	30x9.50R15 LT	104	S	-	12.6	750.3	OWL
	82	31x10.50R15 LT	109	S	-	12.6	776.7	OWL
	75	225/75R15	102	T	460AB	10.7	723.2	RBL
	75	235/75R15	105	T	460AB	11.2	731.8	RBL
	70	205/70R15	96	T	460AB	10.2	672.3	RBL
	70	235/70R15	103	S	460AB	10.2	713.6	OWL
	70	265/70R15	112	T	460AB	11.6	755	RBL
	70	LT255/70R15	113/110	S	-	11.2	739	OWL

UTQG Uniform Tire Quality Grade OWL Outline White Letter



COMMERCIAL VAN



**DEPENDABLE AND DURABLE TIRES
THAT HOLD HEAVY LOADS AND
PROVIDE TERRIFIC LONG-DISTANCE
DRIVING CAPABILITIES**

MILEAGE




MAXMILER-X

MAXMILER-X provides superior carrying ability with good mileage.

FEATURES & BENEFITS

VERTICAL AND OPEN HORIZONTAL GROOVE ARRANGEMENT

Provides excellent wet and dry grip



REINFORCED CONSTRUCTION COMPRISING OF TWO STEEL BELTS AND FULL NYLON PROTECTOR

Delivers robust load carrying capability



SPECIALLY DESIGNED TREAD COMPOUND

Delivers maximum mileage performance with reduced heat

MAXMILER-X

MILEAGE



Inch	Series	Size	Load Index	Speed Rating	UTQG	 Tread Depth mm	 Overall Diameter mm	Side Wall
14		175R14C LT	99/98	N	-	8.3	634	BSW
		195R14C LT	106/104	N	-	8.7	668	BSW
		205R14C LT	109/107	N	-	8.9	686	BSW
13		155R13 LT	90/88	Q	-	8.1	578	BSW
		175R13C LT	97/95	N	-	8.3	610	BSW
12		145R12C LT	80/78	Q	-	8.1	537	BSW

UTQG Uniform Tire Quality Grade BSW Black Side Wall

PREMIUM MILEAGE



MAXMILER Pro

“New generation commercial tire with improved wear and durability for heavy usage on all roads.”




FEATURES & BENEFITS

LARGE SHOULDER BLOCK WITH INTEGRATED SIPES

Comfortable and quiet drive

THREE WIDE CIRCUMFERENTIAL GROOVES

Effective dispense water. Reduce aquaplaning and better handling on wet road condition.

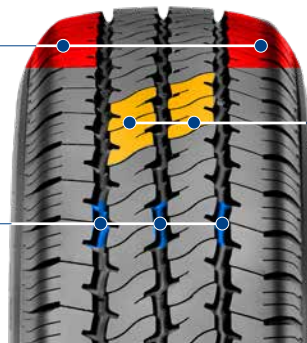



CIRCUMFERENTIAL RIB DESIGNED WITH LATERAL SIPES

Excellent grip on both wet and dry road condition. Lower noise level and improve mileage for longer service

MAXMILER PRO


PREMIUM MILEAGE



Inch	Series	Size	Load Index	Speed Rating	 Tread Depth mm	 Overall Diameter mm	Side Wall
17	60	215/60 R17C LT	109/107	T	9.2	690	BSW
	60	235/60 R17C LT	117/115	R	10.7	714	BSW
16	60	195/60 R16C LT	99/97	H	9.2	640	BSW
	60	215/60 R16C LT	103/101	H	9.2	664	BSW
	65	195/65 R16C LT	104/102	T	9.7	660	BSW
	65	205/65 R16C LT	107/105	T	10.2	672	BSW
	65	215/65 R16C LT	109/107	T	10.2	686	BSW
	65	225/65 R16C LT	112/110	T	10.2	698	BSW
	65	235/65 R16C LT	121/119	R	10.7	712	BSW
	70	215/70 R16C LT	108/106	T	10.2	708	BSW
	75	185/75 R16C LT	104/102	T	9.7	684	BSW
	75	195/75 R16C LT	107/105	R	10.2	698	BSW
	75	205/75 R16C LT	113/111	R	10.2	714	BSW
	75	215/75 R16C LT	116/114	R	10.2	728	BSW
	75	225/75 R16C LT	121/120	R	10.7	744	BSW
15	65	215/65 R15C	104/102	T	10.2	661	BSW
	70	195/70 R15C LT	104/102	R	10.2	655	BSW
	70	205/70 R15C LT	106/104	R	10.2	669	BSW
	70	215/70 R15C LT	109/107	S	10.2	683	BSW
	70	225/70 R15C LT	112/110	R	10.7	697	BSW
		195 R15C LT	106/104	R	10.2	690	BSW
		195 R15C LT	106/104	S	10.2	690	BSW
14	65	175/65 R14C LT	90/88	T	9.2	584	BSW
	75	205/75 R14C LT	109/107	S	10.2	664	WR
		185 R14C LT	102/100	R	9.9	650	BSW
		195 R14C LT	106/104	R	9.7	666	BSW
		205 R14C LT	109/107	P	10.2	686	BSW
13		145 R13C LT	91/89	R	7.7	566	BSW
		165 R13C LT	94/92	R	8.7	596	BSW
		175 R13C LT	97/95	R	8.3	610	BSW
12		145 R12C LT	86/84	N	8.2	537	BSW
		155 R12C LT	88/86	R	8.2	550	BSW

BSW Black Side Wall WR White Ring

ALL SEASON TIRE FOR LIGHT TRUCK COMMERCIAL OPERATIONS

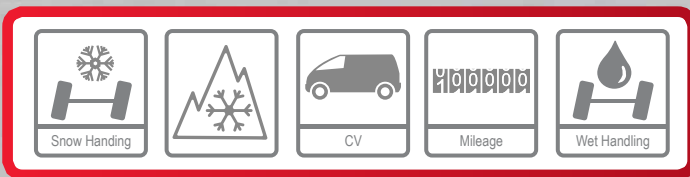

MAXMILER ALLSEASON

“The ideal tire for LTR and van vehicles in the changing weather conditions, combining long lasting mileage and safety.”

FEATURES & BENEFITS

NEW TREAD COMPOUND

Dedicated new advanced All season compound

INNOVATIVE PROFILE

Good traction in low adherence roads covered with snow and ice



OPTIMIZED SLATS AND PROFILE GROOVES

Excellent aquaplaning resistance and short braking distances on wet roads



NEW PROFILE DESIGN

Secure handling and high speed stability in warm summer days

MAXMILER ALLSEASON


ALL SEASON TIRE FOR LIGHT TRUCK COMMERCIAL OPERATIONS



Inch	Series	Size	Load Index	Speed Rating	UTQG	 Tread Depth mm	 Overall Diameter mm	Side Wall
16	65	195/65R16C LT	104/102	T	-	10.2	660	BSW
	65	205/65R16C LT	107/105	T	-	10.2	672	BSW
	65	215/65R16C LT	109/107	T	-	10.2	686	BSW
	65	225/65R16C LT	112/110	R	-	10.2	698	BSW
	65	235/65R16C LT	115/113	R	-	10.2	712	BSW
	75	195/75R16C LT	107/105	R	-	10.2	698	BSW
	75	205/75R16C LT	113/111	R	-	10.2	714	BSW
	75	215/75R16C LT	116/114	R	-	10.2	728	BSW
	75	225/75R16C LT	121/120	R	-	10.2	744	BSW
15	65	215/65R15C LT	104/102	T	-	10.2	661	BSW
	70	195/70R15C LT	104/102	R	-	10.2	655	BSW
	70	215/70R15C LT	109/107	R	-	10.2	683	BSW
	70	225/70R15C LT	112/110	R	-	10.2	697	BSW

UTQG Uniform Tire Quality Grade BSW Black Side Wall

Trailer and Caravans

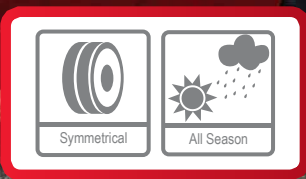

ST-4000

ST-6000

KargoMax

“Kargomax is built specially for caravans and trailers, providing reliability and high mileage.”

FEATURES & BENEFITS

ENHANCED SIDEWALL PROTECTION AND COMPOUND

Ensures resistance from impacts and aging, when exposed to static high ozone environments

PATTERN DESIGN FOR STANDARD CARAVAN AND TRAILER USAGE

Combines high wear with low rolling resistance



HIGH BUTYL CONTENT INNER LINER

Reduce air propagation for long reliable service

OPEN SHOULDER GROOVES

Better heat desperation and turning capability

KargoMax ST-4000

Trailer and Caravans



Inch	Series	Size	Load Index	Speed Rating	UTQG	Tread Depth mm	Overall Diameter mm	Side Wall
15	65	195/65R15	95	N	-	6.4	635	BSW
14	65	185/65R14	93	N	-	6.4	596	BSW
13	70	145/70R13	84	N	-	6.0	534	BSW
	70	155/70R13	78	N	-	6.0	548	BSW
	70	165/70R13	80	N	-	6.0	562	BSW
	70	185/70R13	93	N	-	6.4	590	BSW
	70	195/70R14	96	N	-	6.4	630	BSW
	80	145/80R13	79	N	-	6.0	562	BSW
			155R13	84	N	-	6.0	578

UTQG Uniform Tire Quality Grade BSW Black Side Wall

KargoMax ST-6000

Trailer and Caravans



Inch	Series	Size	Load Index	Speed Rating	UTQG	Tread Depth mm	Overall Diameter mm	Side Wall
16	75	225/75R16C	121/120	N	-	8.0	744	BSW
15	70	195/70R15C	104/102	N	-	7.5	655	BSW
14	70	195/70R14C	104/102	N	-	7.5	630	BSW
	NA	185R14C	104/102	N	-	7.5	650	BSW
13	50	195/50R13C	104/101	N	-	7.4	526	BSW
	NA	155R13C	91/89	N	-	7.2	578	BSW
	NA	165R13C	96/94	N	-	7.2	598	BSW
12	60	185/60R12C	104/101	N	-	7.4	527	BSW
	60	195/60R12C	104/102	N	-	7.5	530	BSW
	70	155/70R12C	104/101	N	-	7.1	523	BSW

UTQG Uniform Tire Quality Grade BSW Black Side Wall

HEAVY DUTY



SUPER TRAVELLER 668

SUPER TRAVELLER 668 is built for light buses and commercial light trucks.

FEATURES & BENEFITS

ROBUST CASING AND BEAD

For resistance to road hazard damage

4 LONGITUDINAL GROOVES

Excellent water evacuation for good wet performance



ROBUST AND SOLID PATTERN DESIGN

Provide good performance and protection in severe usage


SOLID SHOULDER DESIGN

Improve stability, wear and protection

Inch	Series	Size	Load Index	Speed Rating	UTQG	Tread Depth mm	Overall Diameter mm	Side Wall
16		6.50R16 LT	108/107	N	-	9.7	750	BSW
		7.00R16 LT	115/110	N	-	10.7	775	BSW
		7.50R16 LT	122/118	N	-	11.2	805	BSW
15		7.00R15 LT	110/105	N	-	10.7	750	BSW

UTQG Uniform Tire Quality Grade BSW Black Side Wall

Designations, Load Index and Speed Rating

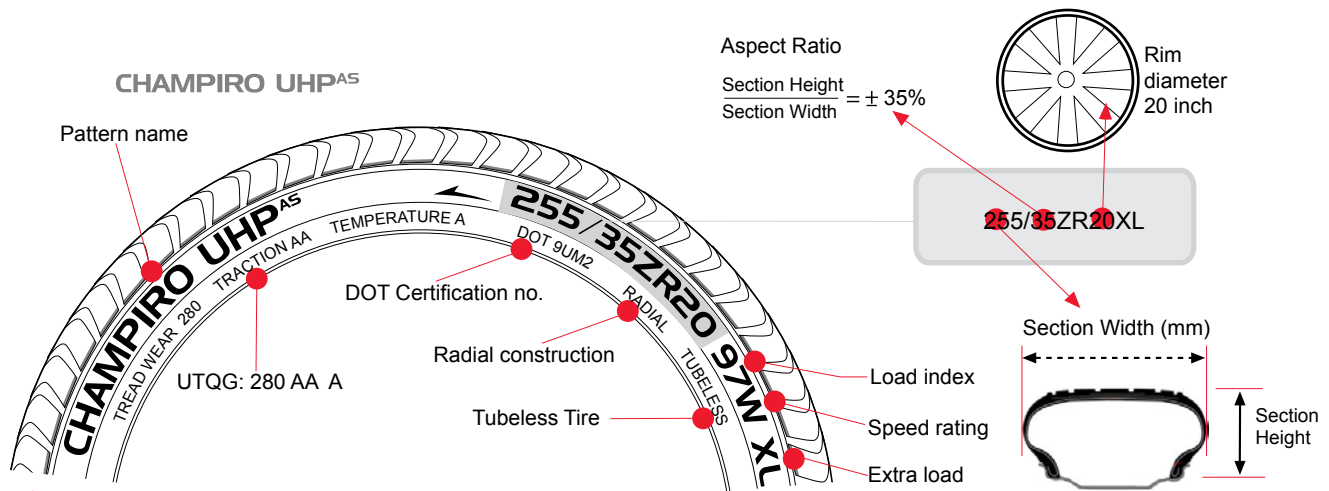

Before fitting, it is essential to check the different markings to ensure that the tire meets the maximum load and speed possibilities and/or the regulations in force.

SAFETY WARNING

1. Never inflate beyond 40PSI (275kPA) to seat beads.
2. Tires should always be installed by qualified technicians following RMA installation procedures.
3. Never mount tires on rims which are damaged or not smooth and clean.
4. Never mount a tire with a torn bead.
5. Never inflate a tire that is lying on the floor or other flat surface.
6. Always use a tire mounting machine with hold-down device or safety cage, or bolt to vehicle axle.

MOUNT ONLY ON A RIM OF EXACT SAME DIAMETER OF THE TIRE.

Speed Rating Symbol

SI	MPH	KM/H
B	31	50
C	37	60
D	40	65
E	43	70
F	50	80
G	56	90
J	62	100
K	68	110
L	75	120
M	81	130
N	87	140
P	93	150
Q	100	160
R	106	170
S	113	180
T	118	190
U	124	200
H	130	210
V	149	240
W	168	270
Y	186	300
(Y)	Above 186	Above 300

Load Capacity Index

LI	LBS	KG	LI	LBS	KG
67	677	307	101	1819	825
68	694	315	102	1874	850
69	716	325	103	1929	875
70	739	335	104	1984	900
71	761	345	105	2039	925
72	783	355	106	2094	950
73	805	365	107	2150	975
74	827	375	108	2205	1000
75	852	387	109	2271	1030
76	882	400	110	2337	1060
77	908	412	111	2403	1090
78	937	425	112	2469	1120
79	964	437	113	2535	1150
80	992	450	114	2601	1180
81	1018	462	115	2679	1215
82	1047	475	116	2756	1250
83	1073	487	117	2833	1285
84	1102	500	118	2910	1320
85	1135	515	119	2998	1360
86	1168	530	120	3086	1400
87	1201	545	121	3197	1450
88	1235	560	122	3307	1500
89	1279	580	123	3417	1550
90	1323	600	124	3527	1600
91	1356	615	125	3658	1650
92	1389	630	126	3748	1700
93	1433	650	127	3858	1750
94	1477	670	128	3968	1800
95	1521	690	129	4079	1850
96	1565	710	130	4189	1900
97	1609	730	131	4299	1950
98	1653	750	132	4409	2000
99	1764	775	133	4542	2060
100	1819	800	134	4674	2120

Load Range Chart

Load Range	Ply Rating	Load Range	Ply Rating
A	2	G	14
B	4	H	16
C	6	J	18
D	8	L	20
E	10	M	22
F	12	N	24

BASIC TIRE KNOWLEDGE

Tire has its special language for its users. The universal language consists of numbers and letters which translate to its specification, brand and pattern. This language is a standard universal language which has been used by tire manufacturers around the world.

235 / 45 Z R 17 94 Y

1 2 3 4 5 6 7



1. Nominal Section Width (mm)

This refers to the width of the tire excluding design and lettering on the sidewall, etc. *Does not include rim guard.

2. Aspect Ratio (series, %)

This figure indicated the ratio of a tire's height (H) to its width (W). The larger the ratio, the fatter the tire.

Aspect ratio (%) = tire height / tire width x 100

3. Speed Category

Symbolizes ultra high performance which are capable of high speed (**ZR**: over 240km/h)

4. Construction Code

Internal tire construction. "R" stands for radial structure.

5. Nominal Rim Diameter (inches)

Refers to the diameter of the wheel rim suitable for that tire. The term "tire's inner diameter" is also used.

6. Load Index (LI)

An index expressing the maximum load permitted for a tire under established conditions.

7. Speed Index (SI)

This indicates the maximum permissible speed in symbols under established conditions.



SIDEWALL INFORMATION

A variety of information about tire appears on its sidewall. Knowing how to identify the markings can be useful when choosing a tire.

1 - GT Radial: Brand Name

2 - 225/45 R18: Tire Size Designation

3 - SportActive: Tread Pattern Name

4 - Identification Serial Number

5 - Max Load, Max Press

6 - Safety Warning



Sidewalls indicate whether they should face inwards or outwards.



It is vital to take note of the arrow when rotating tires to ensure that the tires are mounted in the correct direction.

SPEED INDEX & LOAD INDEX TIRE

SPEED INDEX

The speed symbol refers to the maximum speed capability of a tire. It is only valid for a tire that is properly inflated and loaded with the limits of the assigned load index.

SPEED INDEX	
Speed Symbol	Maximum Speed (km/h)
F	80
G	90
J	100
K	110
L	120
M	130

SPEED INDEX	
Speed Symbol	Maximum Speed (km/h)
N	140
P	150
Q	160
R	170
S	180
T	190

SPEED INDEX	
Speed Symbol	Maximum Speed (km/h)
U	200
H	210
V	240
ZR	Over 240
W	270
Y	300

LOAD INDEX

LOAD INDEX	
Load Index	kg
57	230
58	236
59	243
60	250
61	257
62	265
63	272
64	280
65	290
66	300
67	307
68	315
69	325
70	335
71	345
72	355
73	365
74	375
75	387
76	400
77	412
78	425
79	437
80	450
81	462
82	485
83	487
84	500

LOAD INDEX	
Load Index	kg
85	515
86	530
87	545
88	560
89	582
90	600
91	615
92	630
93	650
94	670
95	690
96	710
97	730
98	750
99	775
100	800
101	825
102	850
103	875
104	900
105	925
106	950
107	975
108	1000
109	1030
110	1060
111	1090
112	1120

LOAD INDEX	
Load Index	kg
113	1150
114	1180
115	1215
116	1250
117	1285
118	1320
119	1360
120	1400
121	1450
122	1500
123	1550
124	1600
125	1650
126	1700
127	1750
128	1800
129	1850
130	1900
131	1950
132	2000
133	2060
134	2120
135	2180
136	2240
137	2300
138	2360
139	2430
140	2500



GT *RADIAL*



www.gtradial.com

© 2020 Giti Tire Pte. Ltd. All Rights Reserved